

HEATSTRIP® Elegance






HEATSTRIP® Elegance

HEATSTRIP Elegance is a range of stylish, premium, high-intensity electric panel heaters. With huge running cost savings compared to bottled gas heaters, HEATSTRIP is ideal for outdoor undercover protected applications, both residential and commercial. The first off-white outdoor heater utilizes the latest technology for maximum comfort. Using the latest material coating and heating element technology.

Features:

- Electric radiant heater perfect for your protected alfresco area, pergola, veranda or café
- The elegant, slimline design and “off-white” colour blends in seamlessly with most white ceilings
- World leading element design produces a more compact and higher output heater
- The device comes with an electric lead and plug (1800W + 2400W)
- Voltage 230V, for United Kingdom 240V
- Significantly more cost-effective than bottled gas heaters
- Convenient DIY installation of 1800W and 2400W models, 3600W model must be hard wired
- The minimum installation height is 2,10 meters. (The panel reaches a temperature of 400 degrees Celsius)
- The heaters are certified IP55 waterproof. This means that the Heatstrips are 100% rain and weatherproof
- 4 year residential warranty and 2 year commercial warranty

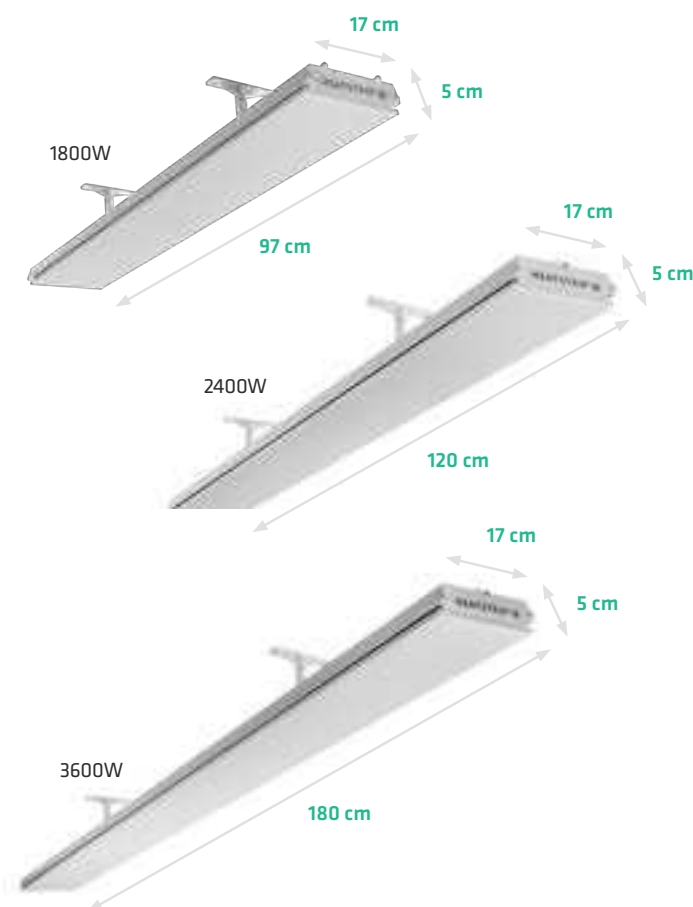


Type	Surface area of covered patio	Surface area of enclosed space	Power (watts)	Current (Amps)	Dimensions (LxWxH)	Weight (Kg)	Lead Length (mm)	Plug	Minimum mounting height	Maximum mounting height
THE1800EU	3 m²	4,5 m²	1800	7.5	974 x 170 x 48.5	4	1000	Yes	2.1 m	2.7 m
THE2400EU	4 m²	6 m²	2400	10	1204 x 170 x 48.5	7	1000	Yes	2.1 m	2.7 m
THE3600EU	6 m²	9 m²	3600	15	1804 x 170 x 48.5	9	1000	No	2.1 m	2.7 m


Accessories



Extension mounting bracket
30 cm, 60 cm, 90 cm & 120 cm

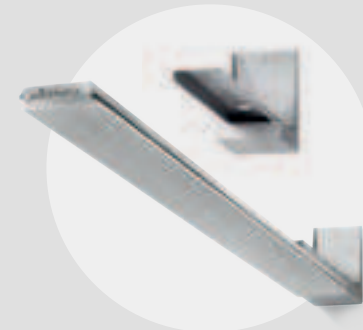

Wall mounting bracket



Wire suspension bracket




Flush mount enclosure

Table settings




6x2400 W

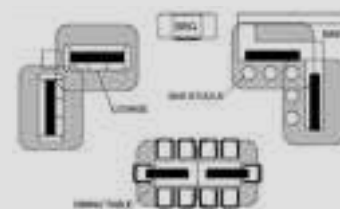


Mounting options


Mounting

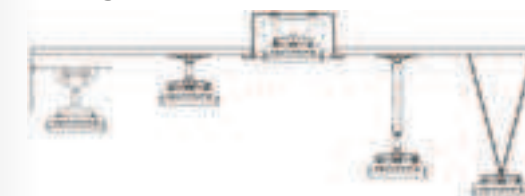

Extension mounting bracket

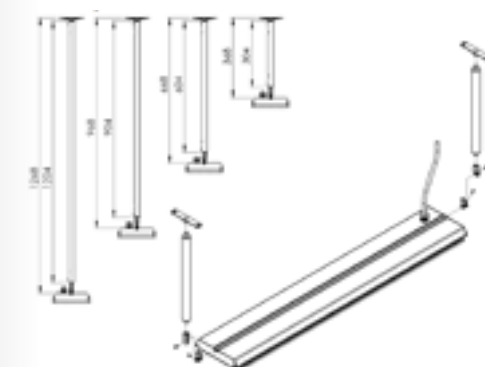

Flush mount enclosure

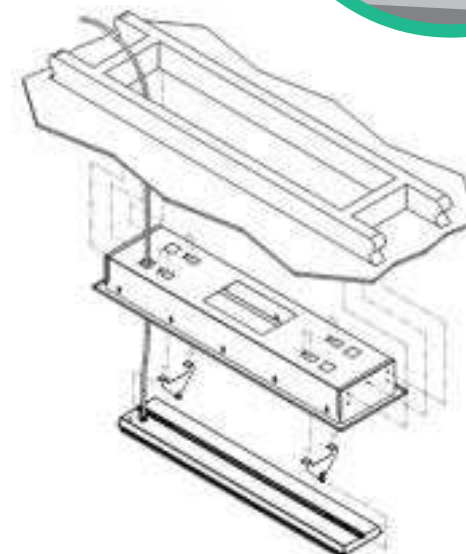

Suitable for model	Part No	Hole cutout dimensions (mm)	Overall dimensions (mm)
THE 1800EU	THEAC-040	1030 x 240	1080 x 290 x 125
THE 2400EU	THEAC-041	1260 x 240	1310 x 290 x 125
THE 3600EU	THEAC-042	1860 x 240	1910 x 290 x 125